

# SAVANTE<sub>MF</sub>

## ESPRESSO

- Unmatched temperature stability
- 4-stage pressure profiling
- 2 auto-adjusting grinders
- Algorithmic, real time adaptive control

## MILK

- Perfect microfoam
- On-board fridge for (2) 1-gallon containers
- Dairy and non-dairy milk alternatives
- Notifications for low product

## inCLEAN

- On-board, automatic cleaning
- Automatic scheduled liquid cleaning enabled for coffee and milk
- Fast and easy cleaning bottle replacement, every 3 weeks, depending on use
- Industry leading water filtration included





Back View



Front View

SAVANTE MF (99A0-SAV-MAZT), glossy black surround panels

## ENGINEERED FOR EXCELLENCE

- **synesso** INSIDE: unmatched temperature stability and 4-stage pressure profiling
- Algorithmic self-adjusting grinders
- Consistent and perfect espresso extraction, automated
- Built for customization: espresso and drink recipes, UI/UX, and external panels

- Multi-bean capable and recipe ready
- Unmatched hot and cold microfoam
- IoT connectivity, for telemetry, recipe and graphic updates
- Surround panels available in glossy black or origami white
- Tool-less access to 3 sides and top of machine
- ADA accessible buttons available

### Weight

246lbs / 112kg

### Dimensions

18" W x 32.5" H x 28" L (45.7cm x 82.6cm x 71.1cm)


### Location Requirements

Electric:  
200-240VAC, 50-60hz, single phase, 30A  
dedicated circuit, L6-30plug


Water:  
Min 40psi - Max 70psi (2.76-4.83 bar), 25gal/hr  
flow, water hardness <3gpg

Drain:  
Accommodating a 3/4" (1.9 cm) ID drain hose,  
drain within 5 feet.

Operating environment:  
Indoor only, ambient temperature must be  
45-80°F (7.2-26.7°C)

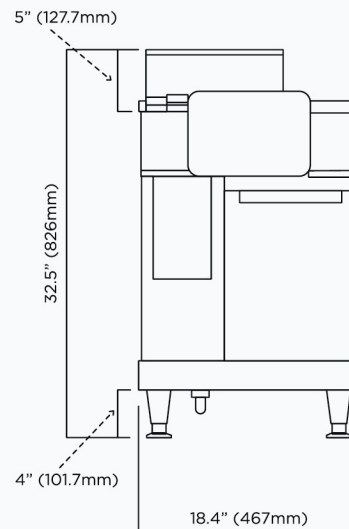

Front View

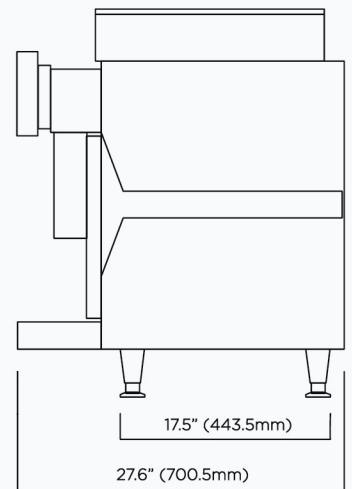

Side View